iAccess Reader 2

Ficha Técnica
Datasheet

Os seguintes direitos são reservados:

• Quaisquer alterações, sem aviso prévio, feitas à funcionalidade ou aparência deste produto invalidarão a garantia.

• O uso deste produto em qualquer ambiente ou de qualquer outra forma que não seja especificado aqui também invalidará a garantia.

• The following rights are reserved:

• Any changes, without prior notice, made to the functionality or appearance of this product will invalidate the warranty.

• The use of this product in any environment or in any other way not specified here will also invalidate the warranty.

iAccess Reader®

O leitor de parede iAccess Reader 2 é projectado para uma variedade de situações, como o acesso a uma área específica, bem como o controle de qualquer sistema eléctrico.

CE

ficha técnica

Material	Aluminio
Tecnologia	Mifare(Classic ISO/iEC 14443-4)
Fechadura Adequada	Fechaduras Electromágneticas
Método de Abertura	Proximidade
Potência	12V DC
Leds	Sim
Consumo	300mA
Consumo Estático	200mA
Tempo Aberto	7s
Software	Sim (SFT01 / iTEC Hybrid)
Stand Alone	Não
IP	N/A
Distância de Leitura	≤ 50mm
Reconhecimento	0.5s
Peso	0,7 Kg
Resistencia à Humidade	<98%
Temp. de Trabalho	-30ºc~+65ºc
Temp. Armazenamento	-20ºc~+55ºc

fechadura electromágnetica

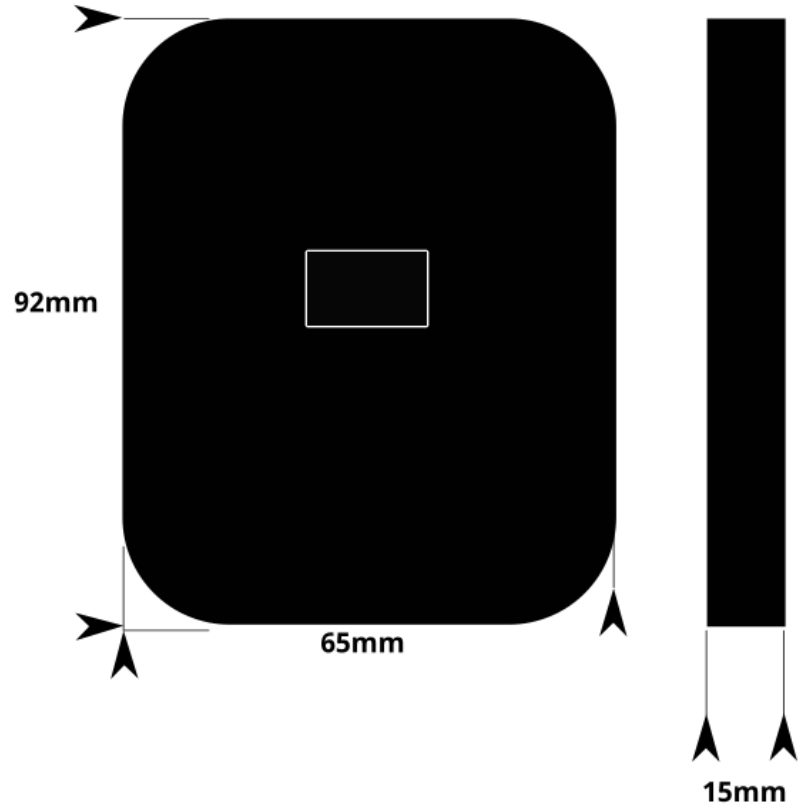

iAccess Reader 2®

EN

The wall reader iAccess Reader 2 is designed for a variety of situations, such as allowing access to a specific area, as well as control of any electrical system.

CE

technical sheet

Material	Aluminium / Alloy
Technology	Mifare®(Classic ISO/iEC 14443-4)
Suitable Mortise	Electromagnetic Locks
Opening Method	Proximity
Power	12V DC
Leds	Yes
Driving Consumption	300mA
Static Consumption	200 mA
Open Time	7s
Software	Yes (SFT01 / iTEC Hybrid)
Stand Alone	No
IP	N/A
Reading Distance	≤ 50mm
Recognition	0.5s
Weight	0,3Kg
Resistance of Humidity	<98%
Work Temperature	-30ºC~+65ºC
Storage Temperature	-20ºC~+55ºC

electromagnetic lock

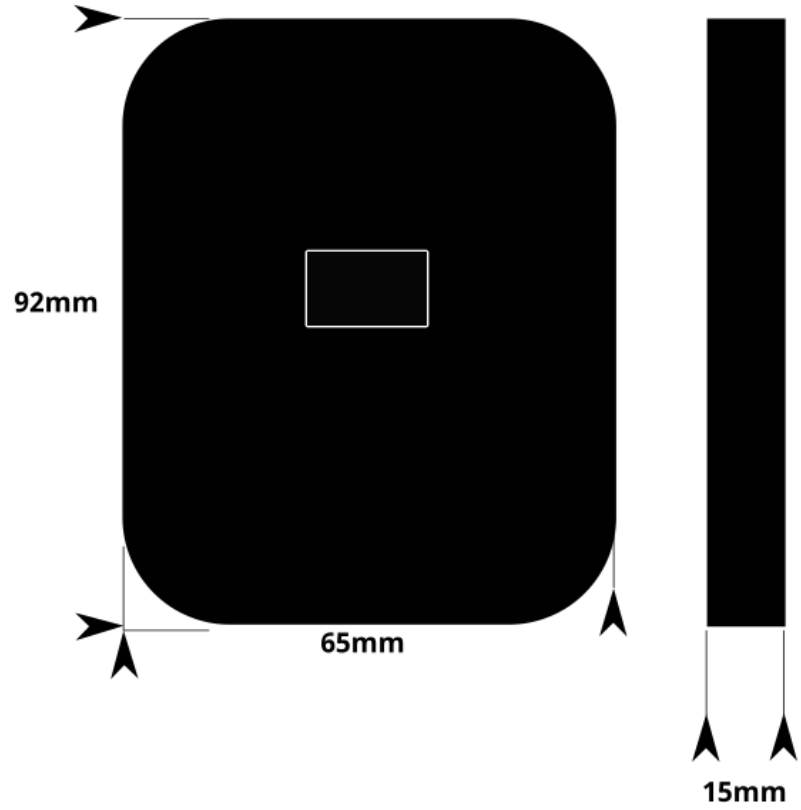

one step forward

iTEC - AC, Lda.
Rua 1º de Maio, 221
4520-115, Espargo
Portugal

Telefone: +351 256 068 810
Telefone: +351 256 318 273
comercial@itec.com.pt